

12V Battery Manager

Battery Manager provides complete management of the charge on the vehicle battery through three major functions.

- Manual battery disconnect
- Automatic battery disconnect
- Automatic stand-by charge limiting

Manual Battery Disconnect

Battery Manager is equipped with a dash mounted switch that allows the driver to manually disconnect the battery to isolate it from the vehicle's loads. This feature assures that when the vehicle is not being used, the battery will not be accidentally discharged by loads such as lighting, radios, etc., being left on when the vehicle is not in use.

To use this function, the driver momentarily presses the dash mounted switch in the "Store" position when leaving the vehicle for an extended period of time. When it is time to put the vehicle back into service, the driver needs only to press the switch in the "Use" position to re-connect the battery.


Automatic Battery Disconnect

The automatic battery disconnect feature is a back-up to the manual disconnect feature. If the ignition switch is "off" and the driver fails to disconnect the battery and it begins to discharge, the **Battery Manager** will automatically disconnect the battery to prevent completely depleting the battery. If **Battery Manager** automatically disconnects the battery, an LED at the dash mounted switch will blink to show that an automatic disconnect has occurred.



131 Eisenhower Lane North
Lombard, IL 60148
630.268.0010 / 1.800.251.2408
FAX 630.916.7890

www.Intellitecsve.com

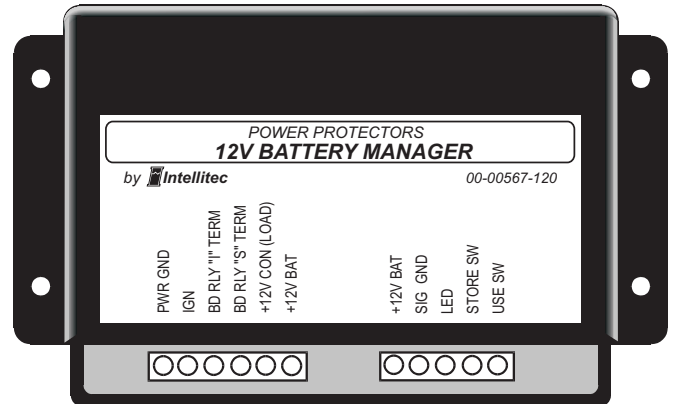

When the driver returns to the vehicle, they will see the blinking LED, indicating that the battery was automatically disconnected.

To re-connect the battery, the driver will again simply press the dash-mounted switch to the "Use" position, as with a manual disconnect.

Automatic Stand-by Charge Limiting

The Battery Manager offers another important feature for batteries that are connected to chargers for extended periods of time. **Battery Manager** monitors the voltage of the battery as an indication of the state of charge. When the ignition switch is "off" and the voltage of the battery rises above 13.8 volts for an hour, **Battery Manager** disconnects the battery and then monitors the voltage to determine the exact state of charge. As long as the battery voltage is above 12.6 volts and the charger is connected, the battery will remain disconnected. When the voltage falls below 12.6 volts, **Battery Manager** will re-connect the battery to the charger to replenish its charge.

This operation prevents the battery from being over charged and boiling the water away.

P/N 53-00567-120 Rev. A 110201

Specialty Vehicle Electronics Group